Willcox High School
GYM LOBBY, RESTROOM & LOCKER ROOM REMODELING AND WRESTLING ROOM ADDITION
240 N. Bisbee Ave, Willcox, AZ 85643

ADDENDUM NO: 2
April 25, 2025

ALL CONTRACT BIDDERS OF RECORD, OWNER & CONSULTING ENGINEERS.

The following changes, additions or deletions are for the above referenced contract documents; all other conditions shall remain the same. Acknowledge receipt of this addendum by inserting its number in the "Bid Form." This addendum forms a part of the contract documents and modifies them as follows:

ITEM 1   General Items:
1. Bid Date: Wednesday, April 30, 2025, 2:00 P.M. **(Unchanged)**
2. Potential Hazardous Materials. The Owner has initiated a study to identify Hazardous Materials. Costs to remediate will be paid for separately by the Owner.
3. Note 7.5 on Sheet a4.0 is correct. The existing wall panels are specified in Specification Section 131250, Metal Building Systems, Part 2, paragraph F. These panels shall also be used on the field Restroom Building.
4. The current fire alarm system is a Notifier. It is currently serviced by Cintas Fire. Contact: Schuyler Waterhouse (520) 884-7979 (o), (520) 237-0380 (c).
5. When school is in session, all workers that are working on site must have a current Fingerprint Card.

ITEM 2   Mechanical Demo Sheets:
1. The status of the existing mechanical system hydronic piping in the Gym is unclear. Cap at existing units as follows:
   a. Lobby Restrooms – Cap inside chase adjacent to restrooms.
   b. Weight & Locker Room – Cap at unit, within 6" of existing ceiling height.

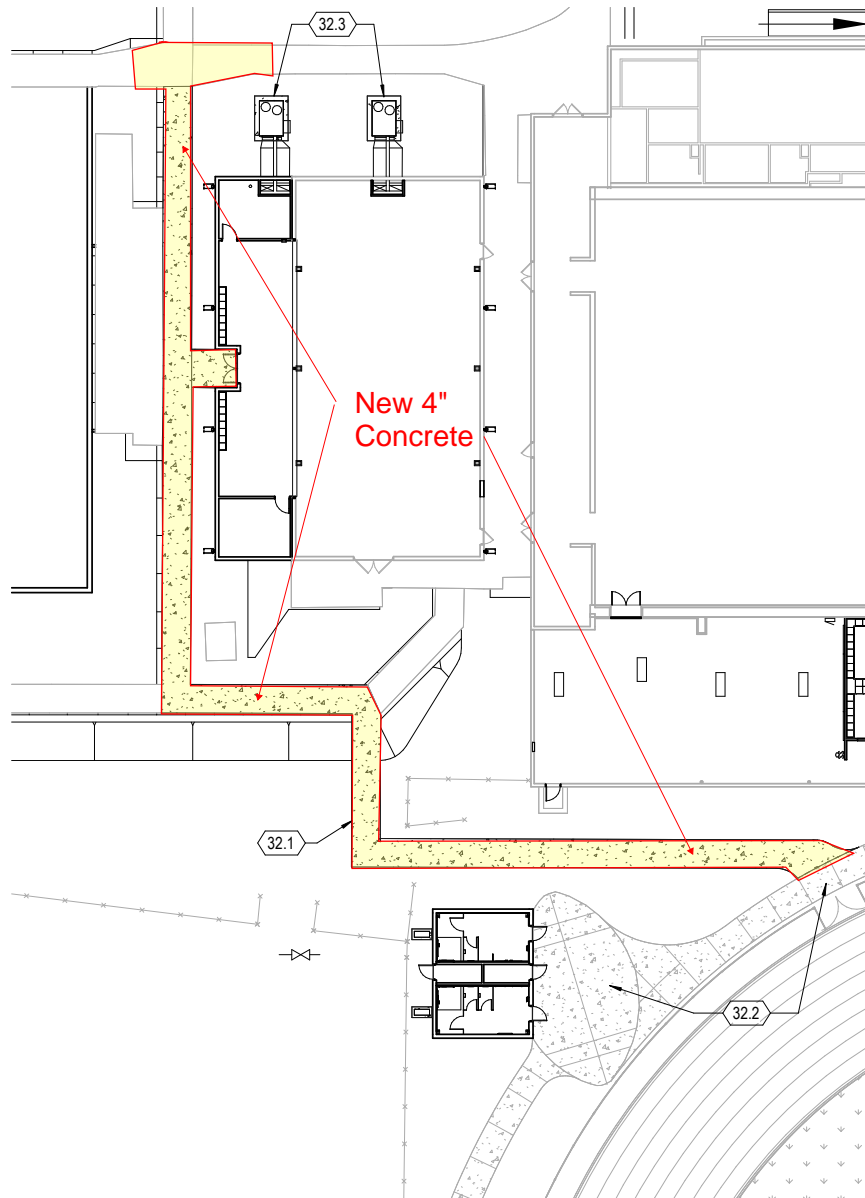**ITEM 3**   Drawings, Sheet C1.5 Site Civil:
1. The existing sidewalk along the west side of the Wrestling Building shall be removed and replaced per Keynote 2. Please refer to the attached exhibit which highlights new concrete.

ITEM 4   Drawings, Sheet a9.0 Wall Types:

1. At wall type, MP, the exterior sheathing may be changed to ⅝" exterior grade plywood to accommodate the metal panel screw pattern.

END OF ADDENDUM NO. 2

Willcox High School
Remodeling
Addendum # 2

swaim
ASSOCIATES LTD
ARCHITECTS AIA

32.3

New 4"
Concrete

32.1

32.2

1
x1.0

site plan - reference

1"=40"

north